


## Characteristics

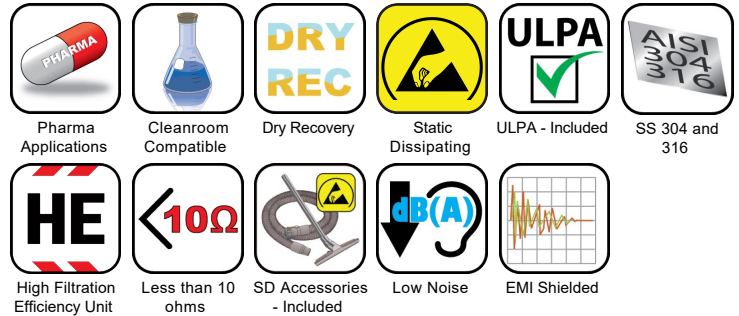


- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - included
- Cleanroom compatible with ISO Class 4 (former Class 10). Can be used in the Pharmaceutical industry
- Static free and ESD safe
- EMI/RFI Shielded
- TELECOM package available
- 4-stage filtration system includes an ULPA Filter (U15), double cloth filter, and disposable filter bags. An internal OSHA compliant HEPA filter (H14) is available as a 5th stage of filtration
- Designed for use in contamination controlled environments
- Powerful dual speed Thru-Flow motor
- For dry recovery only
- Made entirely of chrome-polished steel
- Mounted on a 4-wheel dolly for easy maneuverability
- Includes a complete tool kit.

## Specifications

EMI-CWR	110110B	110110C	110110D	110110E
<b>Model Name</b>	EMI-CWR	EMI-CWR	EMI-CWR	EMI-CWR
<b>Type (Powerhead)</b>	Electric	Electric	Electric	Electric
<b>Tension</b>	240 V	240 V	240 V	240 V
<b>Frequency</b>	50 Hz	50 Hz	50 Hz	50 Hz
<b>Phase</b>	Single	Single	Single	Single
<b>Wattage</b>	1000 W	1000 W	1000 W	1000 W
<b>Power</b>	1 kW	1 kW	1 kW	1 kW
<b>Amperage</b>	4.6 A	4.6 A	4.6 A	4.6 A
<b>Air Flow</b>	204 m <sup>3</sup> /h	204 m <sup>3</sup> /h	204 m <sup>3</sup> /h	204 m <sup>3</sup> /h
<b>Vacuum Pressure</b>	2410 mm H <sub>2</sub> O	2410 mm H <sub>2</sub> O	2410 mm H <sub>2</sub> O	2410 mm H <sub>2</sub> O
<b>Sound Level</b>	70 dB(A)	70 dB(A)	70 dB(A)	70 dB(A)
<b>Type of Power Outlet</b>	European	UK	Swiss	Chinese
<b>Suction Inlet Port</b>	38 mm	38 mm	38 mm	38 mm
<b>Cart Type</b>	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)
<b>Filter Cleaning</b>	None	None	None	None
<b>Dust Recovery Tank</b>	15.1 L	15.1 L	15.1 L	15.1 L
<b>Dry Recovery - Disposable Filter Bag</b>	9.5 L	9.5 L	9.5 L	9.5 L
<b>Length</b>	38 cm	38 cm	38 cm	38 cm
<b>Width</b>	43 cm	43 cm	43 cm	43 cm
<b>Height</b>	71 cm	71 cm	71 cm	71 cm
<b>Weight (Vacuum Only)</b>	16 kg.	16 kg.	16 kg.	16 kg.
<b>Cord Length</b>	10.6 m	10.6 m	10.6 m	10.6 m

Please note that specifications are subject to change without notice


## Use only recommended tools & accessories

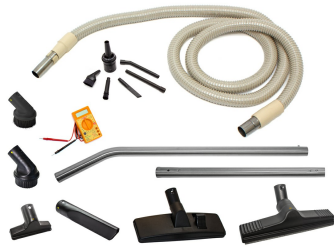

Tools and Accessories for EMI-CWR - Included



#211028 Paper Filter Recovery Bags for model EMI-CWR  
(Package of 5) - Included



EMI SUPPRESSION / RFI SHIELDING



ULPA Filter - Included



Stainless steel holding bracket - Optional